

# Surge Damper

## Smooths Water Flow

- Helps reduce noise and pulsations in the water system
- Protects the pressure switch in pressurised systems
- Suitable for installation into soft hose system
- Supplied complete with mounting clips
- Designed to be mounted in a vertical position
- Connects directly in-line to Whale Quick Connect Plumbing
- For typical installation see page 60

1 Year Warranty




Code: WS7205

### i Product Information

#### Model Specifications

Product Code	Pipe System Used	Fitting Required
WS7205	Quick Connect 12 mm 10 mm (3/8") Flexible Hose	Connects Directly Using Whale Quick Connect 12 mm Fittings Stainless Steel Hose Clips
Capacity	150 ml (1/4 pint)	
Maximum Pressure	4 bar (60 psi)	

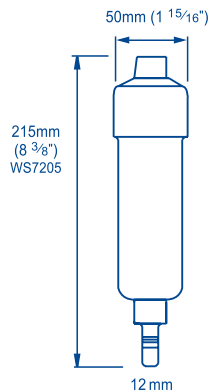

Front View

### Tips

Install as close to the outlet of the pump as possible or as close to the outlet side of the pressure switch (WU7207). See page 60.

# One Way Valves

## Help Maintain Prime in Manual or Electric Systems

- Available in Plastic and Chromed Brass
- Ideal for use with electric submersible pumps (see page 46)


1 Year Warranty



### i Product Information

#### Model Specifications

Product Code	FV1227	FV1235
Hose Connections	Suitable for 13 mm (1/2") Flexible Hose	
Materials	Body: ABS / Chromed Brass, Spring: Phosphor Bronze, Seal: Nitrile®	
Weight	0.04 kg (0.9 lbs)	0.22 kg (0.5 lbs)

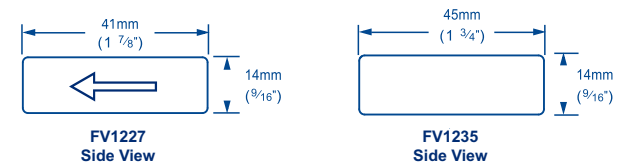

### Tips

- Ensure the valve is installed with the arrow pointing in the direction of the water flow
- The one way valve is for maintaining prime over short periods of time. The low restriction design will have a small drip return.