

Gulper[®] Toilet Pump

Whale Gulper[®] Toilet Pump

For holding tank electric pump out / discharge

No clog, no filter waste pump built on more than a decade of market leading pump technology
- Pumps un-macerated toilet waste



Pumps Un-macerated Toilet Waste With Ease

- Runs dry without damage
- Up to 18 ltrs (4.75 US gal) per minute
- Virtually unblockable
- Rotatable inlet and outlet - allows you to install in awkward locations
- Self priming up to 3 m (9.8 ft) - mount the pump in the most convenient part of boat
- Pumps a mixture of air and waste
- Easy to maintain
- Ideal for holding tanks and vacuum systems

1 Year Warranty

Tips

Ideal for use in conjunction with Whale's robust and durable Diverter Valve 1 1/2" ports – DV5606 - page 124



Awards and Accreditations

- Ignition protection ISO8846
- CE marked

YOU MAY ALSO LIKE

Mark V – Manual Sanitation Pump – page 122

Bilge IC – Pre-wired Automatic bilge system with intelligent control built in – page 24

Grey IC and Gulley IC – Automatic Grey waste pump kits with automatic intelligent control built in – pages 96-99



Product Information

Model Specifications


| Model | Gulper® Toilet Pump | |
|--|--|------------------|
| Product Code | BP2552B | BP2554B |
| Voltage | 12 V d.c. | 24 V d.c. |
| Recommended Fuse Size | 10 amp Automotive | 5 amp Automotive |
| Weight | 2.12 kg (4.75 lbs) | |
| Hose Connections | 38 mm (1 1/2") | |
| Minimum Wire Size | 1.5 mm ² (16 AWG) | |
| Materials | Pump Body: Aluminum, Glass-filled Nylon, Clamp Ring: Acetal Diaphragm: Santoprene®, Valves: Nitrile, Gearwheel: Bronze Feet: EPDM, Fasteners: Stainless Steel, Brass | |
| Service Kit | AK1557- Service Kit | |
| Materials In Contact With Fluid | Glass-filled Nylon, Santoprene®, Nitrile | |
| Maximum Suction Lift | 3 m (10 ft) | |
| Maximum Discharge Head | 3 m (10 ft) | |
| Maximum Suction Lift and Discharge Head (combined) | 3 m (10 ft) | |
| Dry Running Current | 5.5 amps | 2.25 amps |

Performance Data

| | BP2552B / BP2554B | |
|----------------------|---|---|
| Suction Lift | 0 m (0 ft) | 1 m (3 ft) |
| Discharge Head | 1 m (3 ft) | 1 m (3 ft) |
| Flow Rate per Minute | 17.5 ltrs (4.6 US gals) | 16.5 ltrs (4.4 US gals) |
| Current Draw | 6.5 amp (12 V d.c.) 3.25 amp (24 V d.c.) | 7.1 amp (12 V d.c.) 3.55 amp (24 V d.c.) |


Note: These specifications are retail items only.

For details of our bulk pack range for boat builders and wholesalers - contact Whale Support.

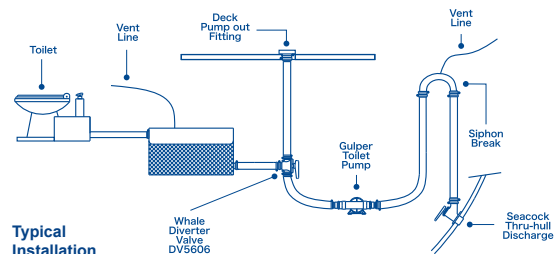


Typical Installation

Note: Where discharge is below the water line, a siphon break must be fitted.



Side View



Plan View



WARNING

It is important to ensure that a syphon break is fitted, where discharge is below the water line.