


Whale Water Heaters

Wide Range of High Capacity Water Heaters

As an expert in water systems, Whale is proud to offer a complete line of water heaters suited for the marine environment. With a variety of options available including multiple capacities and materials, we have the right water heater for your installation

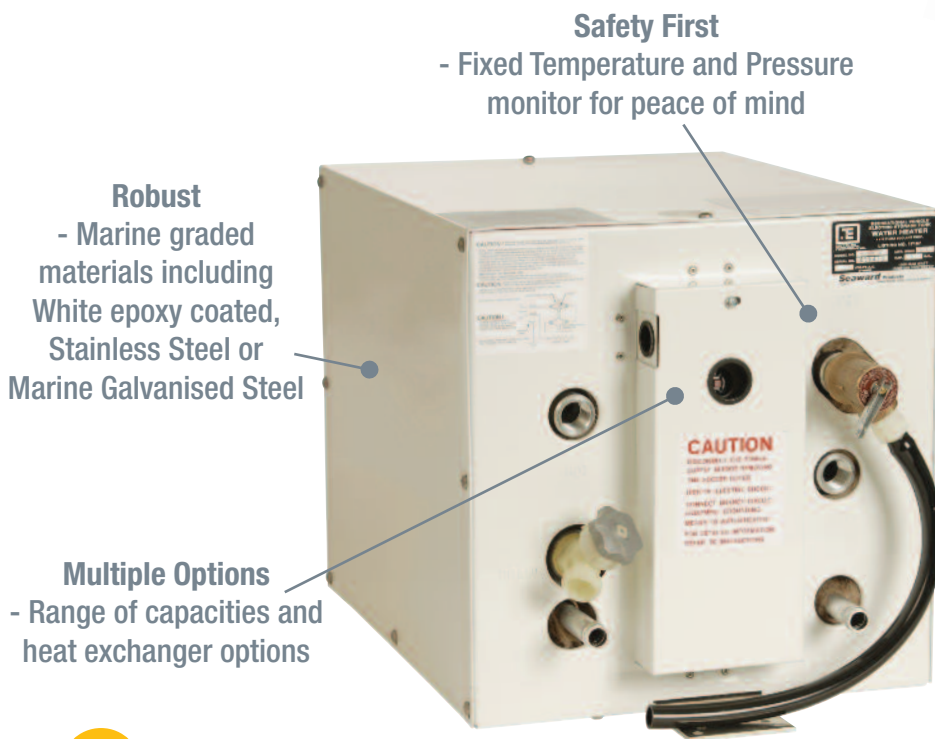

S300EW



White Epoxy Coated
Horizontal with Side Heat Exchanger Model



White Epoxy Coated
Horizontal Electric Only Model



Marine Galvanised Steel
Horizontal Rear Heat Exchanger Model



Stainless Steel
Front Heat Exchanger Model

Product Information

Model Specifications

Model		Capacity	Orientation	Heat Exchanger	PSI Rating	Overall Dimensions W - D - H	Exterior Material	Shipping Weight
120 V	240 V							
S300W		11 lts (3 US gal)	Horizontal	Side	100 psi	368 x 355 x 330mm (14.5" x 14" x 13")	White Epoxy	6.4 kg (14 lbs)
S300EW	S350EW	11 lts (3 US gal)	Horizontal	Electric	100 psi	368 x 355 x 330mm (14.5" x 14" x 13")	White Epoxy	6.4 kg (14 lbs)
F600	F650	23 lts (6 US gal)	Horizontal	Front	100 psi	330 x 483 x 330mm (13" x 19" x 13")	Marine Galvanized Steel	11.8 kg (26 lbs)
F600W	F650W	23 lts (6 US gal)	Horizontal	Front	100 psi	330 x 483 x 330mm (13" x 19" x 13")	White Epoxy	11.8 kg (26 lbs)
	F650WSR	23 lts (6 US gal)	Horizontal	Front	75 psi	330 x 483 x 330mm (13" x 19" x 13")	White Epoxy	11.8 kg (26 lbs)
F700	F750	23 lts (6 US gal)	Horizontal	Front	100 psi	330 x 483 x 330mm (13" x 19" x 13")	Stainless Steel	10.8 kg (24 lbs)
S600	S650	23 lts (6 US gal)	Horizontal	Rear	100 psi	330 x 483 x 330mm (13" x 19" x 13")	Marine Galvanized Steel	11.8 kg (26 lbs)
S600W	S650W	23 lts (6 US gal)	Horizontal	Rear	100 psi	330 x 483 x 330mm (13" x 19" x 13")	White Epoxy	11.8 kg (26 lbs)
S600EW		23 lts (6 US gal)	Horizontal	Electric	100 psi	330 x 483 x 330mm (13" x 19" x 13")	White Epoxy	11.8 kg (26 lbs)
	S650E	23 lts (6 US gal)	Horizontal	Electric	100 psi	330 x 483 x 330mm (13" x 19" x 13")	Marine Galvanized Steel	11.8 kg (26 lbs)
	S650EW-3000	23 lts (6 US gal)	Horizontal	Electric	100 psi	330 x 483 x 330mm (13" x 19" x 13")	White Epoxy	11.8 kg (26 lbs)
S700	S750	23 lts (6 US gal)	Horizontal	Rear	100 psi	330 x 483 x 330mm (13" x 19" x 13")	Stainless Steel	10.8 kg (24 lbs)
S700E	S750E	23 lts (6 US gal)	Horizontal	Electric	100 psi	330 x 483 x 330mm (13" x 19" x 13")	Stainless Steel	10.8 kg (24 lbs)

Range Includes Combination Electric/Heat Exchanger Or Electric Only Models

- Wide Range To Suit Your Installation Requirements
 - Wide range of capacities available - 11, 20, 40, 76 or 106 litres (3, 6, 11, 20 and 28 US Gals)
- Robust Manufacturing
 - Hold down brackets welded to inner tank
- Double Wall Heat Exchangers
 - Prevents accidental contamination of freshwater supply
- Safety Controls
 - Integrated pressure relief valve and temperature monitor
- Sturdy, Robust Exteriors
 - Produced from marine grade stainless steel or epoxy coated
- Ignition Protected

2 Year Warranty

COMPLETE YOUR SYSTEM

Freshwater system accessories such as water filters, and pipework connections – page 76-77

YOU MAY ALSO LIKE

Watermaster Automatic Pressure Pumps – page 54
 Whale Quick Connect plumbing
 - Pipe-work and fittings – page 90-93

Product Information

Model Specifications

Model		Orientation	Heat Exchanger	Capacity	PSI Rating	Overall Dimensions W - D - H	Exterior Material	Shipping Weight
120 V	240 V							
F1100	F1150	Horizontal	Front	42 lts (11 US gal)	100 psi	406 x 559 x 406mm (16"x 22" x 16")	Marine Galvanized Steel	15.4 kg (34 lbs)
F1100W	F1150W	Horizontal	Front	42 lts (11 US gal)	100 psi	406 x 559 x 406mm (16"x 22" x 16")	White Epoxy	15.4 kg (34 lbs)
	F1150WSR	Horizontal	Front	42 lts (11 US gal)	75 psi	406 x 559 x 406mm (16"x 22" x 16")	White Epoxy	15.4 kg (34 lbs)
F1200	F1250	Horizontal	Front	42 lts (11 US gal)	100 psi	406 x 559 x 406mm (16"x 22" x 16")	Stainless Steel	14.5 kg (32 lbs)
S1100	S1150	Horizontal	Rear	42 lts (11 US gal)	100 psi	406 x 559 x 406mm (16"x 22" x 16")	Marine Galvanized Steel	15.4 kg (34 lbs)
S1200	S1250	Horizontal	Rear	42 lts (11 US gal)	100 psi	406 x 559 x 406mm (16"x 22" x 16")	Stainless Steel	14.5 kg (32 lbs)
	H2050	Horizontal	Rear	76 lts (20 US gal)	100 psi	406 x 813 x 406mm (16"x 32" x 16")	Marine Galvanized Steel	21.8 kg (48 lbs)
	H2050EW	Horizontal	Electric	76 lts (20 US gal)	100 psi	406 x 813 x 406mm (16"x 32" x 16")	White Epoxy	21.8 kg (48 lbs)
	H2050EW-3000	Horizontal	Electric	76 lts (20 US gal)	100 psi	406 x 813 x 406mm (16"x 32" x 16")	White Epoxy	21.8 kg (48 lbs)
	H2050EW-4500	Horizontal	Electric	76 lts (20 US gal)	100 psi	406 x 813 x 406mm (16"x 32" x 16")	White Epoxy	21.8 kg (48 lbs)
H2200		Horizontal	Rear	76 lts (20 US gal)	100 psi	406 x 813 x 406mm (16"x 32" x 16")	Stainless Steel	21.3 kg (47 lbs)
	H2250E	Horizontal	Electric	76 lts (20 US gal)	100 psi	406 x 813 x 406mm (16"x 32" x 16")	Stainless Steel	21.3 kg (47 lbs)
HF2000	HF2050	Horizontal	Front	76 lts (20 US gal)	100 psi	406 x 813 x 406mm (16"x 32" x 16")	Marine Galvanized Steel	21.8 kg (48 lbs)
HF2200	HF2250	Horizontal	Front	76 lts (20 US gal)	75 psi	406 x 813 x 406mm (16"x 32" x 16")	Stainless Steel	21.3 kg (47 lbs)
S1800	S1850	Vertical	Front	76 lts (20 US gal)	100 psi	514 x 508 x 686mm (20.25"x 20" x 27")	Marine Galvanized Steel	20.9 kg (46 lbs)
S1800W	S1850W	Vertical	Front	76 lts (20 US gal)	100 psi	514 x 508 x 686mm (20.25"x 20" x 27")	White Epoxy	20.9 kg (46 lbs)
	S1850EW	Vertical	Electric	76 lts (20 US gal)	100 psi	514 x 508 x 686mm (20.25"x 20" x 27")	White Epoxy	20.9 kg (46 lbs)
	S1850WSR	Vertical	Front	76 lts (20 US gal)	75 psi	514 x 508 x 686mm (20.25"x 20" x 27")	White Epoxy	20.9 kg (46 lbs)
S1900	S1950	Vertical	Front	76 lts (20 US gal)	100 psi	514 x 508 x 686mm (20.25"x 20" x 27")	Stainless Steel	20.4 kg (45 lbs)
S1900E		Vertical	Electric	76 lts (20 US gal)	100 psi	514 x 508 x 686mm (20.25"x 20" x 27")	Stainless Steel	20.4 kg (45 lbs)
	H2850ES-3000	Horizontal	Electric	106 lts (28 US gal)	100 psi	406 x 1016 x 406mm (16"x 40" x 16")	Stainless Steel	26.8 kg (59 lbs)
	H2850ES-4500	Horizontal	Electric	106 lts (28 US gal)	100 psi	406 x 1016 x 406mm (16"x 40" x 16")	Stainless Steel	26.8 kg (59 lbs)
	H2850EW-3000	Horizontal	Electric	106 lts (28 US gal)	100 psi	406 x 1016 x 406mm (16"x 40" x 16")	White Epoxy	26.8 kg (59 lbs)
	H2850EW-4500	Horizontal	Electric	106 lts (28 US gal)	100 psi	406 x 1016 x 406mm (16"x 40" x 16")	White Epoxy	26.8 kg (59 lbs)

NOTE: All models in bold are available worldwide. All other models are available in the USA or can be supplied worldwide on request.

Please contact Whale Support for more information.

S300W - 1250W element and requires a 15A Circuit Breaker

3000 and 4500 models have a 3000W and 4000W element respectively and requires a 15A Dual Breaker (3000) or 20A Dual Breaker (4500)

All other models have a 1500W element and require a 15A Circuit Breaker (120V) or 10A Dual Breaker (240V)

Note: All Whale Water Heaters must be installed and serviced by a qualified electrician