



*The lightweight,
powerful, space creating
Propane heating solution
for the RV market*



- Suitable for Towables, Motorhomes and Campervans
- Compact, space saving heating solution with narrow rotatable design
- Installed underfloor, maximising valuable living and storage space

- Enjoy the great outdoors all year round with total comfort day and night
- Versatile - modulating burner technology for highly efficient combustion suitable for wild camping and on-site
- Easy to use, intuitive control panel

More for the manufacturer...



Less Weight
Compact and lightweight design



More Space
Increased bunk space, full length wardrobes and longer beds



Design Freedom
Customisable installation creating a blank canvas for vehicle designers



Connectivity
LIN or CAN control compatibility



More Options
Wide range of models with efficient performance to maximise comfort

More for the user...



Fast heat up and fully automatic output modulation for enhanced user comfort



Quiet night time operation for when you need it most



Cosy van all year round



Even and well maintained heat distribution




Easy to use, no fuss controls


Technical Specifications

| | | HEAT AIR GTR 10 | HEAT AIR GTR 15 |
|--------------------------|--------------------------------|------------------------|-------------------------|
| Conformity | ANSI Z21.47 | Approval No. 5024903 | |
| | CSA 2.3 | | |
| Gas | Type | Propane 11in W.C. | |
| | Heat Input [BTU/hr] | 4,000 - 9,400 | 4,300 - 10,500 - 14,200 |
| | Consumption [oz/hr] | 2.9 - 7.0 | 3.2 - 10.4 |
| Electric 12V d.c. | Voltage [V] | 10.5 to 15.9 | |
| | Standby current* [A] | 0.016 | |
| | Rated Fuse Size [A] | 10 | |
| Temperature | Storage [°F] | -40 to 158 | |
| | Operation [°F] | -4 to 122 | |
| | Control [°F] | 41 - 88 | |
| Physical | Dimensions L x W x H [in] | 21.9 x 10.7 x 6.5 | 18.5 x 10.7 x 6.5 |
| | Weight [lb,oz] | 15lb 7oz | |
| | Max Air Flow @ 0.5mbar [ft³/h] | 5,300 | 7,800 |
| | Altitude Range** [ft] | 0 - 9,000 | |

*Standby Current Draw for Heater only **Output of heater may be limited at higher altitude depending on ambient and operating conditions.

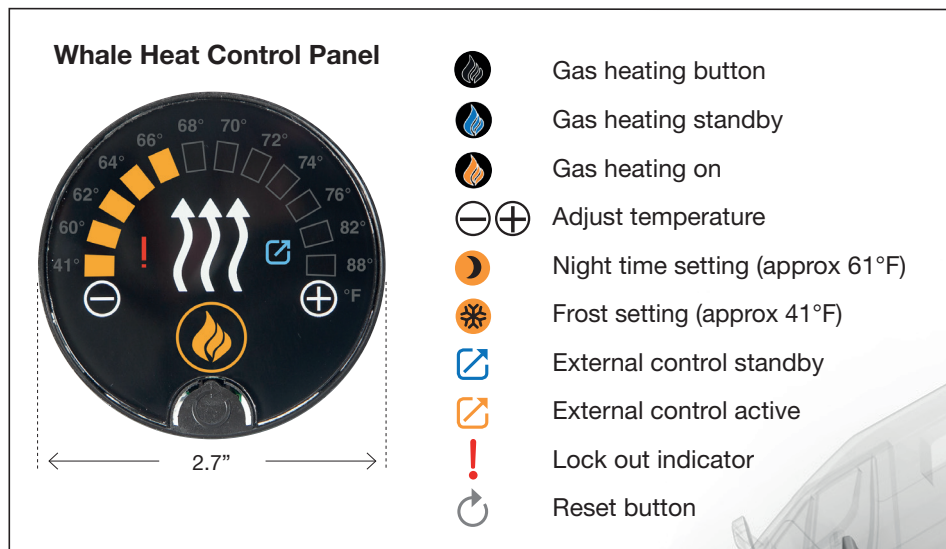

- LIN or CAN control compatibility
- Easy to use, intuitive design
- Low profile & compact
- Modern capacitive touch technology
- Discrete LED auto dim
- High quality UV resistant polymer

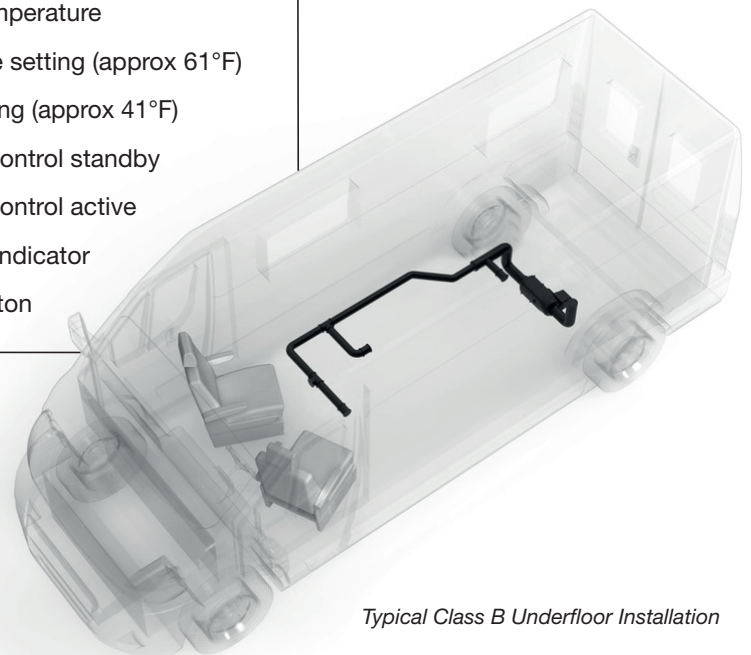

Whale Support

Tel: +1 616 897 2301

usasales@whalepumps.com